

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 0 483 551 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**22.01.1997 Bulletin 1997/04**

(51) Int Cl.<sup>6</sup>: **H04L 12/54, H04Q 7/20,  
H04B 7/26**

(21) Application number: **91117074.4**

(22) Date of filing: **07.10.1991**

(54) **Handoff method and apparatus for mobile wireless workstations**

Umlegungsverfahren und -einrichtung für mobile schnurlose Arbeitsstationen

Méthode et dispositif de transfert pour stations de travail mobiles sans fil

(84) Designated Contracting States:  
**DE FR GB**

(30) Priority: **29.10.1990 US 605720**

(43) Date of publication of application:  
**06.05.1992 Bulletin 1992/19**

(73) Proprietor: **International Business Machines  
Corporation**  
**Armonk, N.Y. 10504 (US)**

(72) Inventor: **Harrison, Colin George**  
**Brookfield, Connecticut 06804 (US)**

(74) Representative: **Schäfer, Wolfgang, Dipl.-Ing.**  
**IBM Deutschland**  
**Informationssysteme GmbH**  
**Patentwesen und Urheberrecht**  
**70548 Stuttgart (DE)**

(56) References cited:  
**EP-A- 0 328 100 EP-A- 0 332 825**  
**WO-A-86/00775**

- **IEEE TRANSACTIONS ON COMMUNICATIONS**  
**vol. 38, no. 8, August 1990, NEW YORK US pages**  
**1272 - 1280 GOODMAN 'Cellular Packet**  
**Communications'**

**EP 0 483 551 B1**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

This invention relates generally to data communication systems and, in particular, to a method and apparatus for managing a migration of a mobile data processing unit through a wireless network without loss of network connection.

Portable data processing apparatus, such as workstations and other devices, may be connected to a local area network (LAN) via wireless links, which may use infrared or radio signals as a communications medium. The connection of the portable data processor to the LAN is through a base station. The base station is an intelligent device that may appear to the LAN as a bridge, a gateway or a concentrator. There may be multiple mobile units connected by wireless links to a single base station, the base station providing a protocol that enables the mobile units to communicate with the LAN. The mobile units may appear to the LAN to be a subnet or to be part of the same logical LAN. Whatever protocol is employed, a mapping exists for ensuring that network data messages, or datagrams, that are addressed to a mobile unit are routed to the appropriate base station for transmission to the addressed mobile unit. The mapping also ensures that datagrams originating with a particular one of the mobile units are correctly routed into the LAN.

A natural feature of a network of portable wireless devices is that a given portable device will continually visit a series of base stations. One example of a useful application is in a hospital environment wherein medical personnel are in contact with a patient database through a wireless network, which in turn is coupled to a wired LAN through which the database is accessible. Base stations may be ceiling mounted in each patient room for sending and receiving information to a handheld data processing device carried by the medical personnel. As the medical personnel make their rounds they can be expected to visit a large number of base stations.

This expected pattern of use gives rise to two distinct sets of problems. Firstly, a mechanism is required to inform senders of which base station is currently hosting a moving data processor. Under one known network protocol, TCP/IP by example, an Address Resolution Protocol (ARP) can perform this function.

A second problem relates to providing a mechanism to conceal from a remote sender that the moving workstation has intermittently disconnected from the network. For some protocols, for example those based on NETBIOS sessions, interruption of the session leads to its termination. For TCP/IP, failure to deliver a frame of data results in some number of retries followed by a timeout and disconnection from the network.

In that movement or migration of the mobile data processors between base stations may be a frequent and on-going activity for some wireless network applications it can be appreciated that it is important to provide mechanisms to sustain the illusion of a permanent,

if virtual, connection of the workstation to the network. To provide such a mechanism it is important to also provide an efficient and reliable method for a given base station to "hand-off" a moving data processor to another base station without loss of connection from the network and without a loss of data being directed from the network to the mobile data processor.

In U.S. Patent No. 4,456,793, issued June 26, 1984, W. E. Baker et al. describe a cordless telephone system having infrared wireless links between handsets and transponders. The transponders are wired to subsystem controllers which are in turn wired to a system controller. The central controller polls the cordless stations every 100 milliseconds to detect cordless station locations and to identify "missing" cordless stations.

In U.S. Patent No. 4,807,222, issued February 21, 1989 N. Amitay describes a LAN wherein users communicate with RF or IR signals with an assigned Regional Bus Interface Unit (RBIU). Protocols such as CSMA/CD and slotted ALOHA are employed in communicating with the RBIs.

In commonly assigned U.S. Patent No. 4,809,257, issued February 28, 1989 D. Gantenbein, F. Gfeller and E. Mumprecht describe an infrared communication system are assigned to one of a plurality of hierarchical categories.

In commonly assigned U.S. Patent No. 4,402,090, issued August 30, 1983, F. Gfeller et al. describe an infrared communication system that operates between a plurality of satellite stations and a plurality of terminal stations. A host computer communicates with the terminal stations via a cluster controller and the satellite stations, which may be ceiling mounted. Communication with the terminal stations is not interrupted even during movement of the terminal stations.

In Japanese Publication 89-169063/23 there is described a voice system that stores a recording of a voice message when a mobile station cannot be reached. Subsequently, the mobile station transmits a message recovery code in response to which a base station sends the recorded message.

In European Patent Application EP-A-0 332 825 issued September 20, 1989 T.A. Freeburg and D.F. Dautel describe a cellular data telephone system for providing data and telephone services. The system responds to a lack of data activity by disconnecting a cellular telephone call, while a landline telephone call is maintained. Subsequently occurring data activity is handled by refreshing the cellular call.

In International Application WO 88/07794, published October 6, 1988, G. Vacon et al. disclose apparatus and method for coupling two LANs by means of a wireless radiation link.

In IBM Technical Disclosure Bulletin, Vol. 20, No. 7, December 1977 F. Closs et al. describe the use of both line-of-sight and diffuse transmission of infrared signals for wireless communications between a ceiling-based controller and a plurality of terminals.

In IBM Technical Disclosure Bulletin, Vol. 24, No. 8, page 4043, January 1982 F. Gfeller describes general control principles of an infrared wireless network incorporating multiple ceiling mounted transponders that couple a host/controller to multiple terminal stations. Access to the uplink channel is controlled by a Carrier Sense Multiple Access/Collision Detection (CSMA/CD) method.

In IEEE Transactions on Communications 38 (1990) August, Nr. 8, p. 1272-1280 D.J. Goodman describes a communication network consisting of fixed base stations which are exchanging cell data packets with mobile wireless terminals. A method for re-routing data packets when a wireless terminal is handed over to a new base station is given. A prerequisite for a continuous data flow according to this method is that the mobile terminal immediately establishes a link with a second base station when breaking a link with a first base station.

It is thus an object of the invention to provide method and apparatus for providing a continual connection of a migrating data processor to a network employing a wireless link.

The foregoing and other problems are overcome and the object of the invention is realized in advantageous manner, by a method, and apparatus for accomplishing the method, that provides a continual connection of a data processor to a wired network as laid down basically in the independent claims. The network is of the type that has a plurality of base stations; or wireless link adapters, each of which directs datagrams from the network over a wireless link to data processors within an associated active group. A given one of the data processors is enabled, at any given time, to be a member of an active group associated with only one link adapter.

In response to the data processor breaking the wireless link with a first, original, link adapter a first step deletes the data processor from the active group of the first link adapter. A second step redirects datagrams intended for the data processor from the first link adapter to a storage device or network spooler.

In response to the data processor subsequently establishing a link with a second, new, link adapter a next step adds the data processor to the active group associated with the second link adapter. Further steps transmit stored datagrams in a First In/First Out order from the storage device to the second link adapter, receive the datagrams from the storage device; and send the received datagrams from the second link adapter to the data processor.

In response to the storage device transmitting all of the stored datagrams to the second link adapter the method includes the further steps of terminating the redirection of datagrams from the first link adapter to the storage device and receiving, from the network with the second link adapter, further datagrams addressed to the data processor.

The above set forth and other features of the invention are made more apparent in the ensuing Detailed Description of the Invention when read in conjunction with the attached Drawing, wherein:

Fig. 1a is a block diagram showing a plurality of mobile units communicating with a base station;

Fig. 1b is a block diagram of the base station of Fig. 1a;

Fig. 1c is a block diagram of the mobile unit of Fig. 1a;

Fig. 2 shows a plurality of overlapping base station communication cells;

Fig. 3 shows a plurality of base stations disposed in separate rooms and not having overlapping coverage areas;

Fig. 4 shows one embodiment of a transmission packet that is suitable for communicating command and data information between the mobile units and a base station;

Fig. 5 depicts a logic flow interaction between a migrating mobile unit and two base stations; and

Fig. 6 is a schematic diagram of a logical LAN having two distinct physical LANs coupled together by a gateway.

## DETAILED DESCRIPTION OF THE INVENTION

Fig. 1a depicts an embodiment of the invention wherein a mobile data processing unit 10 is in bidirectional communication with a network link adapter, or base station 12, over an optical radiation communications channel. The base station 12 is coupled via a connector 14 to a wired local area network (LAN) 16. As shown the base station 12 is disposed within or adjacent to a ceiling 18 and the mobile unit 10 is carried or is otherwise transported over a floor 20. Of course, the mobile unit 10 may be used in a stationary manner if desired.

In accordance with a presently preferred communication technique communication between the mobile unit 10 and the base station 12 is accomplished through two discrete infrared optical channels. Specifically, there is provided a relatively low-bandwidth, for example 50 k Bits/s, command channel (CC) and a relatively higher-bandwidth, for example 1 M Bit/s or higher, data channel (DC). An uplink command channel (CC<sub>U</sub>), uplink being from the mobile unit 10 to the base station 12, has a carrier frequency or wavelength that is offset from a downlink command channel (CC<sub>D</sub>), downlink being from

the base station 12 to the mobile unit 10, by an amount sufficient to prevent collisions between uplink and downlink command messages. Similarly, an uplink data channel ( $DC_U$ ) has a carrier frequency or wavelength that is offset from a downlink data channel ( $DC_D$ ) by an amount sufficient to prevent collisions between uplink and downlink data messages.

The communications channels are carried via an infrared (IR) data link having a preferred wavelength of approximately 1.4 microns, although presently available optical devices readily provide for operation within the range of approximately 750 nanometers to approximately 1000 nanometers. In accordance with the invention the command channel is carried by a diffuse transmission, relatively low bit-rate channel while the data channel is conveyed by a line-of-sight, relatively high bit-rate channel. This permits the control channel of a mobile unit 10, including one that is just coming within range of a base station 12, to establish communication with the base station 12 and also possibly through a network to a host system, before reliable communication becomes feasible on the higher frequency data channel. The result is the provision of a more reliable and more efficient infrared data communications network.

This presently preferred communication technique is disclosed in commonly assigned U.S. Patent Application Serial No. 07/605,586, filed 29 October 1990, entitled "Control Method for an Infrared Wireless Data Link", by C. Harrison et al. (IBM's Docket No. YO990-050).

Referring to Fig. 1b there is shown a simplified block diagram of the base station 12. The base station 12 is coupled to the LAN 16 via the connector 14. Connector 14 is coupled to a network adapter transceiver 22 which in turn is coupled to an internal bus 24. The base station 12 includes a processor 26 that is bidirectionally coupled to a memory 28 that stores program-related and other data, including packets of data transmitted to or received from the mobile units 10. Processor 26 also communicates with a plurality of modulators and receivers, specifically a control modulator 30a, a control receiver 30b, a data modulator 30c and a data receiver 30d. These IR modulators and receivers have inputs coupled to suitable infrared emitting or receiving devices such as laser diodes, LEDs and photodetectors. In the illustrated embodiment the control modulator 30a and the data modulator 30c both have an output coupled to a transmit diode 1 (TD1). In an alternate embodiment the data modulator 30c is not coupled to the TD1 but is instead coupled to a second transmit diode (TD2).

Referring now to Fig. 1c there is shown in block diagram form an embodiment of the mobile unit 10. Mobile unit 10 includes a processor 32 coupled to an operator input device 34 and also coupled to an operator display device 36. Operator input device 34 may be a keyboard or any suitable data entry means. Similarly, operator display device 36 may be a flat panel alphanumeric display or any suitable display means. Also coupled to processor 32 is a memory 38 that stores program-related data

and other data, such as packets of information received from or intended to be transmitted to the base station 12 and also an identification of the mobile unit 10. Also coupled to processor 32 are a plurality of command and data modulators and receivers 40a-40d. In Fig. 1c it can be seen that the command modulator 40a (uplink) is provided with a first frequency  $f_1$  while the command receiver 40b (downlink) is provided with a second frequency  $f_1'$  that is offset from  $f_1$ . Similarly, it can be seen that the data modulator 40c (uplink) is provided with a first frequency  $f_2$  while the data receiver 40d (downlink) is provided with a second frequency  $f_2'$  that is offset from  $f_2$ . The data receivers of Figs 1b and 1c include demodulators and filters and operate in a conventional manner to extract the modulated bit stream from the received optical signals. Similarly, the modulators of Figs. 1b and 1c operate in a conventional manner to modulate the optical output in accordance with a transmitted bit stream.

The wired LAN 16 may conform to any suitable network configuration. One suitable network protocol is known as TCP/IP, as described in detail in "Internetworking with TCP/IP Principles, Protocols, and Architectures" by Douglas E. Comer, Prentice Hall, New Jersey, 1988.

Fig. 2 illustrates a plurality of the base stations 12 each of which is coupled to a wired LAN 16 which in turn is coupled to a host data processing system 50. At least one mass data storage device, or spooler 52, is also coupled to the LAN 16 and is employed in a manner described in detail below. The base stations 12 are disposed such that substantially symmetrical optical fields (42a-42d) associated with each are overlapping. Thus, it can be seen that certain of the plurality of mobile units 10 are contained wholly within a single one of the fields while the mobile unit 10a is disposed within an overlapping region 44 between the fields 42a and 42b. The mobile unit 10c is disposed within a region not covered by any of the base stations 12. During use, the mobile units 10 can be expected to move about within a given region and to travel, or migrate, from one region to another. This is depicted by the mobile units 10e and 10e'. Mobile unit 10e can be seen to enter the region 42d along the path A and to subsequently exit, reenter and again exit the region. The mobile unit 10e' can be seen to follow the path B and to enter the region 42c, pass through an overlap region, pass into the region 42d and subsequently exit the coverage region. As can be appreciated, it is important to provide a handoff mechanism that permits the mobile units 10e and 10e' to establish contact with various ones of the base stations 12 while preserving an appearance of a constant connection to the LAN 16.

Fig. 3 illustrates another embodiment wherein the plurality of base stations 12 are each disposed within a separate cell or room (46a, 46b). In this embodiment there is no overlap between base station fields. So long as a mobile unit is within a room it is in communication

with the associated base station 12. However, for those mobile units 10d which are illustrated to be within a hallway communication may be possible if properly aligned with a doorway or other opening into the enclosed area served by the base station 12.

Communication is preferably achieved by Time Division Multiple Access (TDMA) technique wherein a plurality of slots make up a frame. The frames are repeatedly transmitted and a given mobile unit 10 is assigned one or more specific slots within which to transmit or receive information. Fig. 4 illustrates one suitable slot 48 format that is similar to that disclosed in the before mentioned commonly assigned U.S. Patent 4,402,090. Specifically, a slot delimiter or synchronization (SYNC) field 48a is followed by a destination address field 48b and a source address field 48c. For an uplink message the destination address would be that of a base station 12 while the source address would be that of the transmitting mobile unit 10. In this regard each of the mobile units is assigned an identifier or address that typically corresponds to a network address. The mobile unit 10 addresses may be hardwired or otherwise preassigned. Preferably, the addresses are dynamically assigned when communication is established between the network and the mobile unit 10.

A next slot 48 field is a length field 48d which gives the length in bytes of the following data field 48e. For a command slot the data field will typically be substantially smaller than a data field 48e associated with a data slot. Following the data field 48e is a data integrity field, typically a CRC field 48f. A further slot delimiter is provided by a trailer field 48g. It should be realized that this format is exemplary only and that a number of suitable formats can be devised.

Each slot on the wireless link may be a re-packagitized frame of the wired network protocol, for example, TCP/IP. The destination address field 48b is the address of the base station 12, possibly but not necessarily the base unit's IP address. The source address field 48c is either the base station 12 address (downlink) or the mobile unit 10 address (uplink), also possibly but not necessarily the mobile unit's IP address.

In the optical communication system of the invention all wireless communication is between the base station 12 and the mobile units 10. There is no direct communication between the mobile units 10. The slotted TDMA method is employed for transmission in each direction. Frames of slots 48 are passed to or from mobile units 10 which are allocated specific slots according to an arbitration scheme performed by the base station 12.

The mobile wireless network thus far described provides both media access control and data link control as indicated below.

Media access control relates to arbitration among the group of mobile units 10 for uplink access to the wireless medium of the infrared data link. Control requirements are asymmetric with respect to the uplink and the downlink channels. In the presently preferred embodiment

the uplink and downlink are carried on separate optical wavelengths, thus avoiding collision.

The uplink control problem is relatively complex, since it is responsible for establishing the link when the mobile unit 10 first comes within range of the base station 12. Furthermore, media access control is required for this link.

Typical control events that are conveyed between the mobile unit 10 to the base station 12 upon the lower bandwidth CC<sub>U</sub> channel may include, but are not limited to, the following.

a) Establishment of connection with the base station 12, that is, becoming a member of the base station's mobile unit group.

b) Authentication of the mobile unit's identity.

c) Request for access to the medium, when the mobile unit 10 has one or more slots to transmit. This involves an arbitration performed by the base station 12 among those members of the associated mobile unit group having slots to transmit. These mobile units may also be referred to as "active members".

d) Deletion of access to the medium at the end of a transmission or if the mobile unit 10 "disappears" or disconnects.

e) Control of optical power or of data transmission rates to accommodate a close approach to the base station 12 by the mobile unit 10 or to permit lowered transmission rates when the signal path is shadowed. By example, it may be desirable to reduce transmitted power within a certain radius of the base station 12 in order to prevent overdriving the CR 30b.

f) Allocation of a slot 48 for the uplink data transmission.

g) Re-transmission of uplink slots found to have transmission errors.

h) A request that the mobile unit 10 temporarily suspend transmission.

i) A request that the mobile unit 10 discard any data that remains to be transmitted.

Of these various and exemplary control events the first (a) of establishing connection with the base station 12 is the most complex in that it requires the mobile unit 10 and the base station 12 to detect and acknowledge each other's presence.

In operation a mobile unit 10 seeking a base station 12 transmits a request for connection on the control

channel by using maximum optical power. Since, in a presently preferred embodiment of the invention, the control channel is separate from the data channel this asynchronous transmission does not interfere with uplink data transmission that may be process between the base station 12 and another mobile unit 10, although it may interfere with ongoing uplink control signals.

The access mechanism for the uplink control channel is preferably a simple ALOHA protocol of a type known in the art. This protocol permits asynchronous requests for connection by an approaching mobile unit 10 to be handled in the same manner as requests from the existing group members. To improve the "fairness" of the ALOHA access under near/far conditions, the mobile units 10 preferably have controllably variable power levels for the control signal transmission.

After the new mobile unit 10 is added to the base station 12 group the newly added member of the group is enabled to exchange control messages with the base station 12 using the uplink and downlink control channels.

In regard to downlink control events it is noted that there is no requirement for downlink media access control, since only the base station 12 uses the downlink channel, whereas the uplink channel must be shared by all of the mobile units within the associated group. It is assumed that the base station 12 avoids transmitting slots to mobile units that are not members of the associated group. That is, the base station 12 only transmits to mobile units 10 with which the base station 12 has an established link. For the downlink path therefore, the mobile unit 10 need only recognize slots 48 having the mobile unit's address within the field 48b.

Typical downlink control events that are conveyed from the base station 12 to the mobile unit 10 upon the CC<sub>D</sub> channel may include, but are not limited to, the following.

a) Notification of an intention to transmit to a specific mobile unit 10 (n) slots of information.

b) Notification of the end of the transmission.

Uplink responses to these control events from the mobile unit 10 to the base station 12 include the following.

a) Acknowledgement of the receipt of a slot.

b) A request for re-transmission of a slot.

c) A request for a temporary suspension of data transmission due to, for example, a buffer full condition.

d) A request for a more rapid transmission of slots. A base station 12 response to this uplink control event may be to allocate more time slots 48 within

a frame to the requesting mobile unit 10.

e) A request for a less rapid transmission of slots. A base station 12 response to this uplink control event may be to allocate fewer time slots 48 within a frame to the requesting mobile unit 10.

The downlink control channel is broadcast to all mobile units within the group and the control slot 48 address field 48b enables only the addressed mobile unit(s) to identify their control messages. The downlink data channel is also broadcast to all mobile units within the group and the corresponding data slot 48 address field 48b enables only the addressed mobile unit(s) to identify their respective data packets.

The newly added mobile unit 10 synchronizes with the data link slot sequence by being assigned one slot number by the base station 12, via the control channel. Thereafter the mobile unit 10 is expected to internally keep track of slot numbers, although it can request to be assigned a slot any number of times. The uplink and downlink paths employ the same set of slot numbers. A mobile unit 10 which has been authorized to use the uplink path waits for the beginning of its' authorized slot before sending data. A mobile unit 10 which has been instructed via the control channel to expect one or more packets of data from the downlink channel waits for the specified slot to occur and then begins to capture the information conveyed by that slot. A mobile unit can thus receive and transmit using a single assigned control or data slot.

The base station 12 buffers within the memory 28 data received from the wired network or from the uplink data channel. Data packets are transmitted in the order received within specified priority levels. The base station 12 refrains from transmitting except when it has data or control information to broadcast.

What follows now is a detailed description of a presently preferred handoff method for managing migration of the mobile units within the wireless network. It should be realized although that the handoff method of the invention is not limited for use in only a wireless network as described thus far. That is, there is no requirement that the units employ separate control and data channels, or that infrared radiation be employed to provide the communication medium. That is, the teaching of the invention is also applicable to systems employing radio frequency (RF) or other types of energy as a communication medium. Nor is any one specific network topology or network access method required to realize the teaching of the invention.

There are two circumstances in which a mobile unit 10 may lose contact with the base station 12 on which it is currently hosted.

A first circumstance is when the wireless link to the base station 12 is broken. The base station 12 eventually determines that it can no longer communicate to the mobile unit 10, typically by the expiration of a commu-

nication timeout.

In general, the base station 12 may have advance notice that the link will be broken and, in a worst case, discovers that the link is broken after some delay of, for example, one second. The base station 12 executes the following method, as depicted in Fig. 5, to preserve an illusion of continued connection to the LAN 16.

#### STEP A:

The base station 12 deletes the mobile unit 10 from its active group, but continues to accept network datagrams for the mobile unit's address and, if the network protocol in use so requires, sends an acknowledgement back to the sender on behalf of the mobile unit 10.

#### STEP B:

The received datagrams are not directed to the wireless network downlink, but are re-directed instead to the spooler 52. Spooler 52 is comprised of, by example, a network file server that includes a large file system and a database manager. The base station 12 sends the re-directed datagrams to a port of the database manager, which queues the datagrams in storage using the mobile unit's address as a key. The base station 12 also logs in a memory 28 file 28a datagram identifiers for each datagram sent to the spooler 52.

#### STEP C:

After some period of time the mobile unit 10 re-establishes connection to a base station 12, possibly the original base station, and the (new) base station 12 adds the mobile unit 10 to its active group, but does not yet notify the LAN 16 and begin to receive network datagrams for the mobile unit 10.

#### STEP D:

The new base station 12 queries the mobile unit 10 over the wireless link to determine the identification of the original base station 12 that the mobile unit 10 was previously connected to. Also, in a multi-spooler LAN embodiment, the mobile unit 10 may be queried to determine which spooler the original base station 12 was expected to use. The new base station 12 may also query, over the LAN 16, the original base station 12 to determine which spooler 52 was used to log the datagrams.

#### STEP E:

The new base station 12 then queries the spooler 52, over the LAN 16, for any datagrams that the spooler 52 may have stored for the mobile unit just added to the active group. Spooler 52 begins the transfer, over the LAN 16, of stored datagrams to the new base station 12

in First In/First Out (FIFO) order. This transfer takes place from the spooler 52 to a LAN address owned permanently by the new base station 12 and then from the new base station 12 to the mobile unit 10 over the wireless link.

It is noted that during this time the mobile unit 10 still appears, to the LAN 16, to be attached to the original base station 12. This condition remains in effect until the spooling process is completed and the original base station 12 completes the handoff. This illusion of continued connectivity to the original base station 12 is maintained to avoid multiple interrupted handoffs. Thus, if the handoff is interrupted while the retrieval is in progress, the retrieval process can resume at the same or another base station 12, as described in greater detail below.

As each datagram is transferred to the mobile unit 10 via the new base station 12 the datagram is deleted from the spooler 52 queue and added to a received log 28b in the new base station 12. It is noted that the old base station 12 may continue to re-direct datagrams to the spooler 52 during this retrieval period, thereby adding entries to its' associated sent log 28a.

#### STEP F:

After the spooler 52 is emptied, and in the case of path A in Fig. 2 where the original base station is the same as the new base station, datagrams are no longer directed to the spooler 52. By comparing the sent log 28a with the received log 28b the base station determines if it has retrieved all datagrams from the spooler 52. In the case of missing datagrams spooler 52 is queried for datagrams placed into the queue after it was first emptied. When all datagrams are accounted for base station 12 deletes the two logs 28a and 28b.

#### STEP G:

Referring to Fig. 6, if the original base station 12 is not identical to the new base station 12 (path B of Fig. 2) and/or if the mobile unit 10e has crossed from one physical LAN 16 to another physical LAN 16' the new base station 12' informs a bridge or gateway 54, if one is implemented, of the mobile units' new location. The new base station 12' begins to receive network datagrams for the mobile unit 10 and sends a message over the LAN 16 to the original base station 12 requesting it to suspend re-direction of datagrams to the spooler 52 and to send a copy of the sent log 28a. The original base station 12 deletes the sent log 28a after sending it, thus completing its handoff. By comparing the sent log 28a received from the previous base station 12 with the associated received log 28b, the new base station 12 determines if it has retrieved all datagrams from the spooler 52. In the case of missing datagrams spooler 52 is queried for datagrams placed into the queue after it was first emptied. Duplicate datagrams, which are received by both the old and the new base stations 12 and sent

to the spooler 52 queue by the old base station 12, are also detected and eliminated. When all datagrams are accounted for the new base station 12 deletes the two logs 28a and 28b.

It should be noted that the only missing datagrams to be recovered during handoff are any that are lost during the changeover from re-direction by the original base station 12 to reception by the new base station 12'. These datagrams may have been sent to the spooler 52 after the new base station 12' believes it has emptied the queue. Messages lost in the network (missing frame numbers) are detected when the base station 12 performing re-direction receives, or fails to receive, the datagram from the network as part of a basic transport layer protocol. Thus, the original sequence of datagrams is preserved and there is no requirement for a sender to buffer an entire sequence in order to ensure that all are eventually received by a target mobile unit.

A critical step in the method is the suspension of redirection at the old base station 12. When this step is completed (STEPS F or G), the original base station 12 has successfully handed off the mobile unit 10 and is no longer involved. However, the handoff process does not occur until the new base station 12' has completed transfer of datagrams from the spooler 52. If the mobile unit 10 again loses contact before the original base station 12 has completed its handoff, the original base station 12 continues to perform redirection while the new base station 12' has simply served to retrieve a portion of the queued datagrams from the spooler 52. In this case the new base station 12' notifies the original base station 12 to delete from its sent log 28a those datagrams that were successfully delivered to the mobile unit 10 by the new base station 12'. Eventually the mobile unit 10 makes contact with another "new" base station 12 and the retrieval process is restarted. In that the order of the datagrams is preserved in the retrieval process the retrieval process may be interrupted at will without a loss of data or datagram order. The mobile unit 10 can be expected to eventually remain in contact with a base station 12 for an amount of time sufficient to complete the datagram retrieval process and complete the handoff.

If the spool server 52 is a separate system on the LAN 16 the method requires that each datagram is transmitted three times over the LAN: once from the original sender, once to the spooler 52 and once from the spooler 52. This network traffic may be avoided if each base station 12 also incorporates a file system. However, there are practical objections to the additional complexities required for such an implementation.

The additional network traffic is approximately proportional to a ratio of the time the mobile unit 10 is disconnected from the network to a total session time for communication with the remote sender. If the network bandwidth is sufficiently high, and if the rate of mobile unit migration is also high, in some modes of usage direct datagram transfer rarely occurs. For this case most

datagrams are transferred in brief bursts of retrieval from the spooler 52. This may be considered to be a "normal" mode of operation for an intermittent wireless network such as might occur in the case of mobile robots or transportation systems incorporating base stations 12 alongside highways or railway tracks.

As was previously stated the handoff method of the invention is not limited for use in only a wireless network as described. Also, there is no requirement that the units employ separate control and data channels, or that infrared radiation be employed to provide the communication medium. Nor is any one specific network topology or network protocol or access method required to realize the teaching of the invention. Furthermore, certain steps or substeps of the method may be combined or accomplished in a different order while still achieving substantially the same result.

## 20 Claims

1. A method for providing a continual connection of a data processor means (10) to a wired network (16) of the type having a plurality of wireless link adapter means (12) each of which bidirectionally passes data to and from the network over a wireless link, the data being transmitted to or received from data processor means (10) having means for coupling to the wireless link, comprising the steps of:
  - in response to the data processor means (10) breaking the wireless link with a first link adapter means,
    - re-directing to network storage means (52), with the first link adapter means, any data received from the network that is intended for the data processor means (10);
    - in response to the data processor means (10) establishing a link with a second link adapter means,
      - transmitting stored data from the network storage means (52) the second link adapter means;
      - receiving the data from the storage means (52);
      - and
      - sending the received data from the second link adapter means to the data processing means (10);
  - in response to the network storage means (52) transmitting all of the stored data to the second link adapter means,
    - terminating the re-direction of data from the first link adapter means to the storage means (52);
    - and
    - receiving from the network (16) with the second



link adapter means any further data addressed to the data processing means (10).

2. Method as set forth in Claim 1 wherein the first link adapter means and the second link adapter means are the same link adapter means (12). 5
3. Method as set forth in Claim 1 or 2 wherein the step of redirecting includes a step of maintaining, with the first link adapter means, a first record for identifying the data re-directed to the storage means (52). 10
4. Method as set forth in Claim 1, 2 or 3 wherein the step of receiving the data from the storage means (52) includes a step of maintaining, with the second link adapter means, a second record for identifying the data received from the storage means (52). 15
5. Method as set forth in Claim 1, 2, 3 or 4 wherein the step of terminating includes a step of transmitting the first record from the first link adapter means to the second link adapter means and wherein the method includes a further step of comparing the received first record to the second record to determine if all stored data has been received from the storage means (52). 20
6. A method providing providing a continual connection of a data processor means (10) to a wired network (16) of the type having a plurality of wireless link adapter means (12) each of which directs data from the network (16) over a wireless link to data processor means (10) within an associated active group, wherein the data processor means (10) is enabled, at any given time, to be a member of an active group associated with only one link adapter means (12), comprising the steps of: 25
  - interrogating the data processor means (10) to determine an identity of the first link adapter means; and
  - interrogating the identified first link adapter means to determine an identity of the storage means (52) to which the data is being redirected.
7. Method as set forth in Claim 6 wherein the step of adding the data processing means (10) to the active group includes a step of: 30
  - interrogating the data processor means (10) to determine an identity of the first link adapter means; and
  - interrogating the identified first link adapter means to determine an identity of the storage means (52) to which the data is being redirected.
8. Method as set forth in Claim 7 wherein the step of interrogating the data processing means (10) includes a step of transmitting data over a diffuse infrared radiation link and wherein the step of sending the received data from the second link adapter means to the data processing means (10) includes a step of transmitting data over a line-of-sight infrared radiation link. 35
9. Method as set forth in Claim 6, 7 or 8 wherein the step of redirecting includes a step of maintaining a first log that identifies the data re-directed to the storage means (52). 40
10. Method as set forth in Claim 5, 6, 7 or 8 wherein the step of receiving the data from the storage means (52) includes a step of maintaining a second log that identifies the data received from the storage means (52). 45
11. Method as set forth in anyone of Claims 6 to 10 wherein the step of receiving the data addressed to the data processing means (10) with the second link adapter means includes an initial step of informing 50

ond link adapter means;

receiving the data from the storage means (52), and

sending the received data from the second link adapter means to the data processing means (10);

in response to the storage means (52) transmitting all of the stored data to the second link adapter means,

terminating the re-direction of data from the first link adapter means to the storage means (52); and

receiving from the network (16) further data addressed to the data processing means (10) with the second link adapter means.

7. Method as set forth in Claim 6 wherein the step of adding the data processing means (10) to the active group includes a step of:

interrogating the data processing means (10) to determine an identity of the first link adapter means; and

interrogating the identified first link adapter means to determine an identity of the storage means (52) to which the data is being redirected.

8. Method as set forth in Claim 7 wherein the step of interrogating the data processing means (10) includes a step of transmitting data over a diffuse infrared radiation link and wherein the step of sending the received data from the second link adapter means to the data processing means (10) includes a step of transmitting data over a line-of-sight infrared radiation link. 35

9. Method as set forth in Claim 6, 7 or 8 wherein the step of redirecting includes a step of maintaining a first log that identifies the data re-directed to the storage means (52). 40

10. Method as set forth in Claim 5, 6, 7 or 8 wherein the step of receiving the data from the storage means (52) includes a step of maintaining a second log that identifies the data received from the storage means (52). 45

11. Method as set forth in anyone of Claims 6 to 10 wherein the step of receiving the data addressed to the data processing means (10) with the second link adapter means includes an initial step of informing 50

a network bridge means that the second link adapter means is associated with a second network.

12. Method as set forth in anyone of the preceding Claims wherein the step of sending includes a step of transmitting the data with an infrared radiation medium or with a radio frequency medium.

13. Apparatus for providing a continual connection of a data processor means (10) to a wired network (16) of the type having a plurality of wireless link adapter means (12) each of which bidirectionally passes data to and from the network (16) over a wireless link, the data being transmitted to or received from data processor means (10) having means for coupling to the wireless link, comprising:

data storage means (52) bidirectionally coupled to the network (16);

means, responsive to the data processor means (10) breaking the wireless link with a first link adapter means, for re-directing to the data storage means (52) any data received from the network (16) that is intended for the data processor means (10);

means, responsive to the data processor means (10) establishing a link with a second link adapter means, for initiating the transmission of stored data from the data storage means (52) to the second link adapter means;

means for receiving the data from the data storage means (52); and

means for sending over the wireless link the received data from the second link adapter means to the data processor means (10);

means, responsive to the data storage means (52), transmitting all of the stored data to the second link adapter means, for terminating the re-direction of data from the first link adapter means to the data storage means (52); and

means for receiving from the network (16) with the second link adapter means any further data addressed to the data processing means (10)

14. Apparatus as set forth in Claim 13 wherein each of the link adapter means (12) and the data processing means (10) each include means for transmitting and receiving control information over a diffuse infrared radiation link and means for transmitting and receiving the data over a line-of-sight infrared radiation link.

## Patentansprüche

1. Ein Verfahren zur Bereitstellung einer kontinuierlichen Verbindung zwischen einem Datenprozessormittel (10) und einem verdrahteten Netzwerk (16) von der Art, die eine Vielzahl von schnurlosen Verbindungsadaptermitteln (12) hat, von denen jedes über eine schnurlose Verbindung Daten in beiden Richtungen in das und aus dem Netzwerk überträgt, wobei die Daten, die an die Datenprozessormittel (10) übertragen oder von diesen empfangen werden, Mittel zum Anschluß an die schnurlose Verbindung haben und das Verfahren Schritte enthält, um als Reaktion auf die Datenprozessormittel (10) die schnurlose Verbindung mit einem ersten Verbindungsadaptermittel zu unterbrechen, mit dem ersten Verbindungsadaptermittel Daten, die von dem Netzwerk empfangen werden und für die Datenprozessormittel (10) bestimmt sind, an die Netzwerkspeichermittel (52) umzuleiten; als Reaktion auf die Datenprozessormittel (10) eine Verbindung mit einem Verbindungsadaptermittel zu erstellen, gespeicherte Daten aus den Netzwerkspeichermitteln (52) an das zweite Verbindungsadaptermittel zu übertragen; Daten aus den Speichermitteln (52) zu empfangen; und die Daten, die von dem zweiten Verbindungsadaptermittel empfangen wurden an die Datenprozessormittel (10) zu senden; als Reaktion auf die Netzwerkspeichermittel (52) alle gespeicherten Daten an das zweite Verbindungsadaptermittel zu übertragen, die Umleitung von Daten aus dem ersten Verbindungsadaptermittel an die Speichermittel (52) zu beenden; und mit dem zweiten Verbindungsadaptermittel irgendwelche Daten, die an die Datenprozessormittel (10) adressiert waren, von dem Netzwerk (16) zu empfangen.
2. Verfahren wie in Anspruch 1 ausgeführt, wobei das erste Verbindungsadaptermittel und das zweite Verbindungsadaptermittel die gleichen Verbindungsadaptermittel (12) sind.
3. Verfahren wie in Anspruch 1 oder 2 ausgeführt, wobei der Schritt für die Umleitung einen Schritt enthält, um mit dem ersten Verbindungsadaptermittel eine erste Aufzeichnung zu behalten, damit die Daten, die an die Speichermittel (52) umgeleitet wer-

den, identifiziert werden können.

4. Verfahren wie in Anspruch 1, 2 oder 3 ausgeführt, wobei der Schritt, um Daten aus den Speichermitteln (52) zu empfangen, einen Schritt enthält, um mit dem zweiten Verbindungsadaptermittel eine zweite Aufzeichnung zu behalten, damit die Daten, die von den Speichermitteln (52) empfangen werden, identifiziert werden können.

5. Verfahren wie in Anspruch 1, 2, 3 oder 4 ausgeführt, wobei der Schritt für den Abschluß einen Schritt enthält, um die erste Aufzeichnung aus dem ersten Verbindungsadaptermittel an das zweite Verbindungsadaptermittel zu übertragen und das Verfahren einen weiteren Schritt enthält, um die empfangene erste Aufzeichnung mit der zweiten Aufzeichnung zu vergleichen und zu bestimmen, ob alle gespeicherten Daten von den Speichermitteln (52) empfangen wurden.

6. Ein Verfahren zur Bereitstellung einer kontinuierlichen Verbindung zwischen einem Datenprozessormittel (10) und einem verdrahteten Netzwerk (16) von der Art, die eine Vielzahl von schnurlosen Verbindungsadaptermitteln (12) hat, von denen jedes über eine schnurlose Verbindung Daten aus dem Netzwerk (16) an ein Datenprozessormittel (10) in einer angeschlossenen aktiven Gruppe steuert, wobei das Datenprozessormittel (10) zu einer gegebenen Zeit aktiviert wird, ein Mitglied einer aktiven Gruppe zu sein, die nur mit einem Verbindungsadaptermittel (12) verbunden ist und das Verfahren Schritte enthält, um als Reaktion auf die Datenprozessormittel (10) die schnurlose Verbindung mit einem ersten Verbindungsadaptermittel zu unterbrechen,

die Datenprozessormittel (10) aus der aktiven Gruppe des ersten Verbindungsadaptermittels zu löschen; und

die Daten, die für das Datenprozessormittel (10) bestimmt sind, an ein Speichermittel (52) umzuleiten;

als Reaktion auf das Datenprozessormittel (10) eine Verbindung mit einem zweiten Verbindungsadaptermittel herzustellen,

das Datenprozessormittel (10) zu der aktiven Gruppe hinzuzufügen, die an das zweite Verbindungsadaptermittel angeschlossen ist;

gespeicherte Daten mit einem FIFO Befehl aus dem Speichermittel (52) an die zweiten Verbindungsadaptermittel zu übertragen;

die Daten aus dem Speichermittel (52) zu empfangen; und

die empfangenen Daten aus dem zweiten Verbindungsadaptermittel an die Datenprozessormittel (10) zu senden;

als Reaktion auf die Speichermittel (52) alle gespeicherten Daten an das zweite Verbindungsadaptermittel zu übertragen,

die Umleitung von Daten von dem ersten Verbindungsadaptermittel an die Speichermittel (52) zu beenden; und

aus dem Netzwerk (16) weitere Daten zu empfangen, die mit dem zweiten Verbindungsadaptermittel an die Datenprozessormittel adressiert werden.

7. Verfahren wie in Anspruch 6 ausgeführt, wobei der Schritt, um die Datenprozessormittel (10) der aktiven Gruppe hinzuzufügen, einen Schritt enthält, um

die Datenprozessormittel (10) abzufragen, eine Identität des ersten Verbindungsadaptermittels zu bestimmen; und

das erste identifizierte Verbindungsadaptermittel abzufragen, eine Identität des Speichermittels (52) zu bestimmen, in welches die Daten umgeleitet wurden.

8. Verfahren wie in Anspruch 7 ausgeführt, wobei der Schritt zum Abfragen des Datenprozessormittels (10) einen Schritt enthält, um Daten über eine diffuse Infrarotstrahlenverbindung zu übertragen und der Schritt, um die Daten von dem zweiten Verbindungsadaptermittel an die Datenprozessormittel (10) zu senden, einen Schritt enthält, um Daten über eine Sichtlinien-Infrarotverbindung zu übertragen.

9. Verfahren wie in Anspruch 6, 7 oder 8 ausgeführt, wobei der Schritt zur Umleitung einen Schritt enthält, um ein erstes Protokoll zu behalten, das die Daten identifiziert, die an die Speichermittel (52) umgeleitet werden.

10. Verfahren wie in Anspruch 5, 6, 7 oder 8 ausgeführt, wobei der Schritt, um Daten von dem Speichermittel (52) zu empfangen, einen Schritt enthält, um ein zweites Protokoll zu behalten, das die Daten identifiziert, die von dem Speichermittel (52) empfangen werden.

11. Verfahren wie in irgendeinem der Ansprüche 6 bis 10 ausgeführt, wobei der Schritt, um Daten zu emp-

fangen, die an das Datenprozessormittel adressiert wurden, einen Anfangsschritt enthält, um ein Netzwerkbrückenmittel zu informieren, daß das zweite Verbindungsadaptermittel an ein zweites Netzwerk angeschlossen ist.

12. Verfahren wie in irgendeinem der vorhergehenden Ansprüche ausgeführt, wobei der Schritt zum Senden einen Schritt zum Übertragen der Daten mit einem Infrarotstrahlenmedium oder mit einem Radiofrequenzmedium enthält.

13. Gerät zur Bereitstellung einer kontinuierlichen Verbindung zwischen einem Datenprozessormittel (10) und einem verdrahteten Netzwerk (16) von der Art, die eine Vielzahl von schnurlosen Verbindungsadaptermitteln (12) hat, von denen jedes über eine schnurlose Verbindung Daten in beiden Richtungen in das und aus dem Netzwerk überträgt, wobei die Daten, die an die Datenprozessormittel (10) übertragen oder von diesen empfangen werden, Mittel zum Anschluß an die schnurlose Verbindung haben, mit

Datenspeichermitteln (52), die in beiden Richtungen mit dem Netzwerk (16) verbunden sind;

Mitteln, die auf die Datenprozessormittel (10) reagieren, um die schnurlose Verbindung mit einem ersten Verbindungsadaptermittel zu unterbrechen, um die Daten, die von dem Netzwerk (16) empfangen werden und für die Datenprozessormittel (10) bestimmt sind, an das Datenspeichermittel (52) umzuleiten;

Mitteln, die auf die Datenprozessormittel (10) reagieren, um eine Verbindung mit einem Verbindungsadaptermittel zu erstellen, um die Übertragung der gespeicherten Daten aus dem Datenspeichermittel (52) an das zweite Verbindungsadaptermittel auszulösen;

Mitteln, um die Daten aus dem Datenspeichermittel (52) zu empfangen; und

Mitteln, um die Daten, die von dem zweiten Verbindungsadaptermittel empfangen werden, über die schnurlose Verbindung an das Datenprozessormittel (10) zu übertragen;

Mitteln, die auf das Datenspeichermittel (52) reagieren, indem alle gespeicherten Daten an die zweiten Verbindungsadapter übertragen werden, um die Umleitung von Daten aus dem ersten Verbindungsadaptermittel an die Datenspeichermittel (52) zu beenden; und

Mitteln, um mit dem zweiten Verbindungsadap-

termittel irgendwelche Daten, die an die Datenprozessormittel (10) adressiert waren, von dem Netzwerk (16) zu empfangen.

- 5 14. Gerät wie in Anspruch 13 ausgeführt, wobei jedes der Verbindungsadaptermittel (12) und der Datenprozessormittel (10) Mittel enthält, um Steuerinformationen über eine diffuse Infrarotstrahlenverbindungen zu übertragen und zu empfangen und Mittel  
10 enthält, um die Daten über eine Sichtlinien-Infrarotstrahlenverbindung zu übertragen und zu senden.

#### Revendications

- 15 1. Procédé destiné à procurer une connexion permanente d'un moyen de processeur de données (10) à un réseau câblé (16) du type comportant une pluralité de moyens d'adaptateurs de liaison sans fil (12) dont chacun fait passer de façon bidirectionnelle des données vers le réseau ou depuis celui-ci sur une liaison sans fil, les données étant émises ou reçues depuis le moyen de processeur de données (10) comportant un moyen destiné au couplage de la liaison sans fil, comprenant les étapes consistant à :

en réponse au moyen de processeur de données (10), interrompre la liaison sans fil avec un premier moyen d'adaptateur de liaison,

rediriger vers un moyen de mémorisation du réseau (52), avec le premier moyen d'adaptateur de liaison, toutes données quelconques reçues depuis le réseau, qui sont destinées au moyen de processeur de données (10),

en réponse au moyen de processeur de données (10), établir une liaison avec un second moyen d'adaptateur de liaison,

transmettre les données mémorisées depuis le moyen de mémorisation du réseau (52) vers le second moyen d'adaptateur de liaison,

recevoir les données depuis le moyen de mémorisation (52), et

envoyer les données reçues depuis le second moyen d'adaptateur de liaison au moyen de traitement des données (10).

50 en réponse au moyen de mémorisation du réseau (52), transmettre la totalité des données mémorisées au second moyen d'adaptateur de liaison,

mettre fin à la redirection des données depuis le premier moyen d'adaptateur de liaison vers le moyen de mémorisation (52), et

recevoir du réseau (16), avec le second moyen

d'adaptateur de liaison, toutes données ultérieures adressées au moyen de traitement des données (10).

2. Procédé selon la revendication 1, dans lequel le premier moyen d'adaptateur de liaison et le second moyen d'adaptateur de liaison sont le même moyen d'adaptateur de liaison (12). 5
3. Procédé selon la revendication 1 ou la revendication 2, dans lequel l'étape consistant à rediriger, comprend une étape consistant à conserver, avec le premier moyen d'adaptateur de liaison, un premier enregistrement destiné à identifier les données redirigées vers le moyen de mémorisation (52). 10 15
4. Procédé selon la revendication 1, 2 ou 3, dans lequel l'étape consistant à recevoir les données depuis le moyen de mémorisation (52) comprend une étape consistant à conserver, avec le second moyen d'adaptateur de liaison, un second enregistrement destiné à identifier les données reçues depuis le moyen de mémorisation (52). 20 25
5. Procédé selon la revendication 1, 2, 3 ou 4, dans lequel l'étape consistant à mettre fin à la redirection comprend une étape consistant à transmettre le premier enregistrement depuis le premier moyen d'adaptateur de liaison vers le second moyen d'adaptateur de liaison et dans laquelle le procédé comprend une étape supplémentaire consistant à comparer le premier enregistrement reçu au second enregistrement pour déterminer si toutes les données mémorisées ont été reçues depuis le moyen de mémorisation (52). 30 35
6. Procédé destiné à procurer une connexion permanente d'un moyen de processeur de données (10) à un réseau câblé (16) du type comportant une pluralité de moyens d'adaptateurs de liaison sans fil (12), dont chacun dirige les données provenant du réseau (16) sur une liaison sans fil vers un moyen de processeur de données (10) à l'intérieur d'un groupe actif associé, dans lequel le moyen de processeur de données (10) est validé, à tout instant donné, pour être un membre d'un groupe actif associé à un seul moyen d'adaptateur de liaison (12), comprenant les étapes consistant à : 40 45  
en réponse au moyen de processeur de données (10), interrompre la liaison sans fil avec un premier moyen d'adaptateur de liaison,

supprimer le moyen de processeur de données (10) du groupe actif du premier moyen d'adaptateur de liaison, et 55

rediriger des données destinées au moyen de

processeur de données (10) vers un moyen de mémorisation (52),

en réponse au moyen de processeur de données (10), établir une liaison avec un second moyen d'adaptateur de liaison,

ajouter le moyen de processeur de données (10) au groupe actif associé au second moyen d'adaptateur de liaison,

transmettre des données mémorisées dans l'ordre premier entré premier sorti (FIFO) depuis le moyen de mémorisation (52) vers le second moyen d'adaptateur de liaison,

recevoir les données depuis le moyen de mémorisation (52), et

envoyer les données reçues depuis le second moyen d'adaptateur de liaison vers le moyen de traitement des données (10),

en réponse au moyen de mémorisation (52), transmettre la totalité des données mémorisées au second moyen d'adaptateur de liaison,

mettre fin à la redirection des données depuis le premier moyen d'adaptateur de liaison vers le moyen de mémorisation (52), et

recevoir depuis le réseau (16) d'autres données adressées au moyen de traitement des données (10) avec le second moyen d'adaptateur de liaison.

7. Procédé selon la revendication 6, dans lequel l'étape consistant à ajouter le moyen de traitement des données (10) au groupe actif comprend une étape consistant à :

interroger le moyen de traitement des données (10) afin de déterminer une identité du premier moyen d'adaptateur de liaison, et

interroger le premier moyen d'adaptateur identifié afin de déterminer une identité du moyen de mémorisation (52) vers lequel les données sont redirigées.

8. Procédé selon la revendication 7, dans lequel l'étape consistant à interroger le moyen de traitement des données (10) comprend une étape consistant à transmettre des données sur une liaison à rayonnement infrarouge diffusé et dans lequel l'étape consistant à envoyer les données reçues depuis le second moyen d'adaptateur de liaison vers le moyen de traitement des données (10), comprend

une étape consistant à transmettre des données sur une liaison à rayonnement infrarouge à portée directe.

9. Procédé selon la revendication 6, 7 ou 8, dans lequel l'étape consistant à rediriger comprend une étape consistant à conserver une première journalisation qui identifie les données redirigées vers le moyen de mémorisation (52). 5
10. Procédé selon la revendication 5, 6, 7 ou 8, dans lequel l'étape consistant à recevoir les données depuis le moyen de mémorisation (52) comprend une étape consistant à conserver une seconde journalisation qui identifie les données reçues depuis le 10
11. Procédé selon l'une quelconque des revendications 6 à 10, dans lequel l'étape consistant à recevoir les données adressées au moyen de traitement des données (10) avec le second moyen d'adaptateur de liaison, comprend une étape initiale consistant à informer un moyen de pontage de réseau de ce que le second moyen d'adaptateur de liaison est associé à un second réseau. 15 20 25
12. Procédé selon l'une quelconque des revendications précédentes, dans lequel l'étape consistant à envoyer comprend une étape consistant à transmettre les données avec un support de rayonnement infrarouge ou avec un support à haute fréquence. 30
13. Dispositif destiné à procurer une connexion permanente d'un moyen de processeur de données (10) à un réseau câblé (16) du type comportant une pluralité de moyens d'adaptateurs de liaison sans fil (12), dont chacun fait passer de façon bidirectionnelle des données vers le réseau (16) et depuis celui-ci sur une liaison sans fil, les données étant transmises ou reçues depuis un moyen de processeur de données (10), comportant un moyen destiné à coupler la liaison sans fil, comprenant : 35 40

un moyen de mémorisation de données (52) couplé de façon bidirectionnelle au réseau (16), 45

un moyen, répondant au moyen de processeur de données (10) pour interrompre la liaison de données avec un premier moyen d'adaptateur de liaison, afin de rediriger vers le moyen de mémorisation des données (52) toutes données reçues depuis le réseau (16) qui sont destinées au moyen de processeur de données (10), 50 55

un moyen, répondant au moyen de processeur de données (10), pour établir une liaison avec

un second moyen d'adaptateur de liaison afin de lancer la transmission des données mémorisées depuis le moyen de mémorisation de données (52) vers le second moyen d'adaptateur de liaison,

un moyen destiné à recevoir les données depuis le moyen de mémorisation des données (52), et

un moyen destiné à envoyer sur la liaison sans fil les données reçues depuis le second moyen d'adaptateur de liaison, vers le moyen de traitement des données (10),

un moyen, répondant au moyen de mémorisation des données (52), pour transmettre la totalité des données mémorisées au second moyen d'adaptateur de liaison, afin de mettre fin à la redirection des données depuis le premier moyen d'adaptateur de liaison vers le moyen de mémorisation des données (52), et

un moyen destiné à recevoir depuis le réseau (16), avec le second moyen d'adaptateur de liaison, toutes données ultérieures adressées au moyen de traitement des données (10).

14. Dispositif selon la revendication 13, dans lequel chacun des moyens d'adaptateur de liaison (12) et le moyen de traitement des données (10) comprennent chacun un moyen destiné à transmettre et à recevoir des informations de commande sur une liaison à rayonnement infrarouge diffusé et un moyen destiné à transmettre et à recevoir les données sur une liaison à rayonnement infrarouge à portée directe.

FIG. 1a

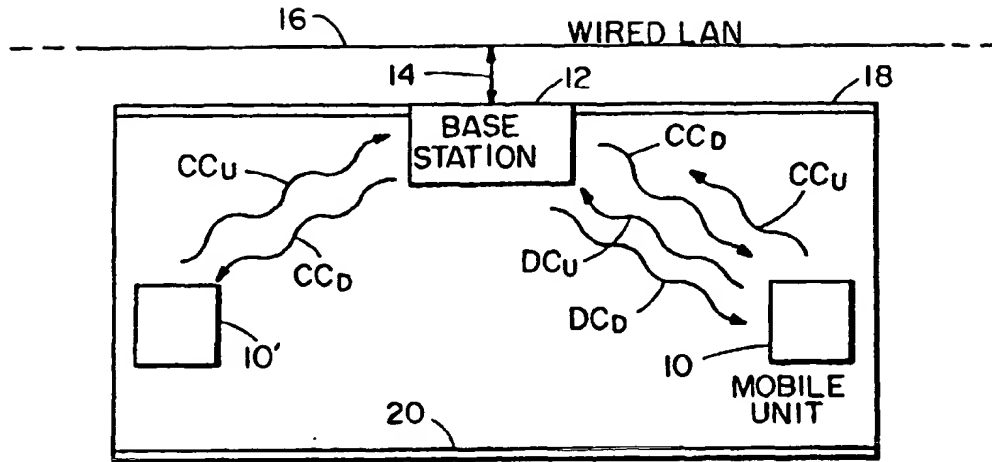
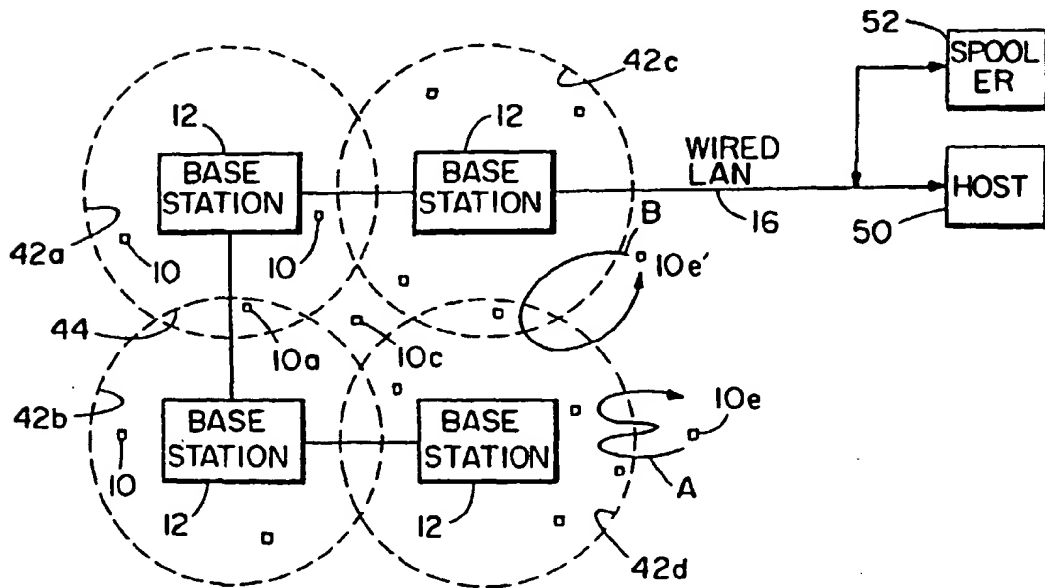


FIG. 2



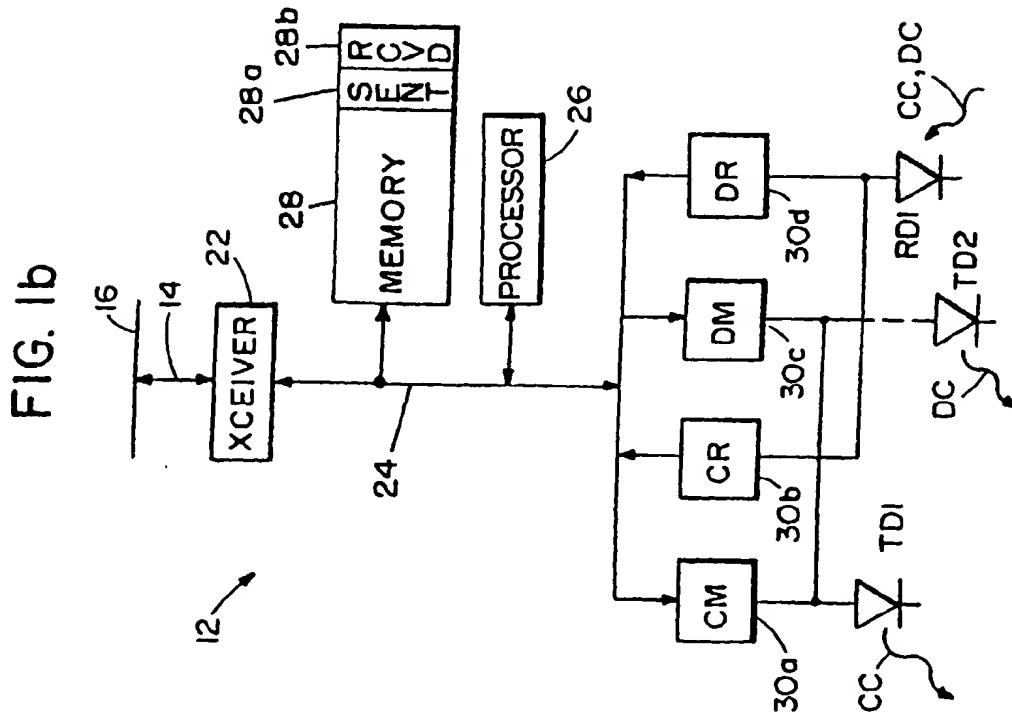
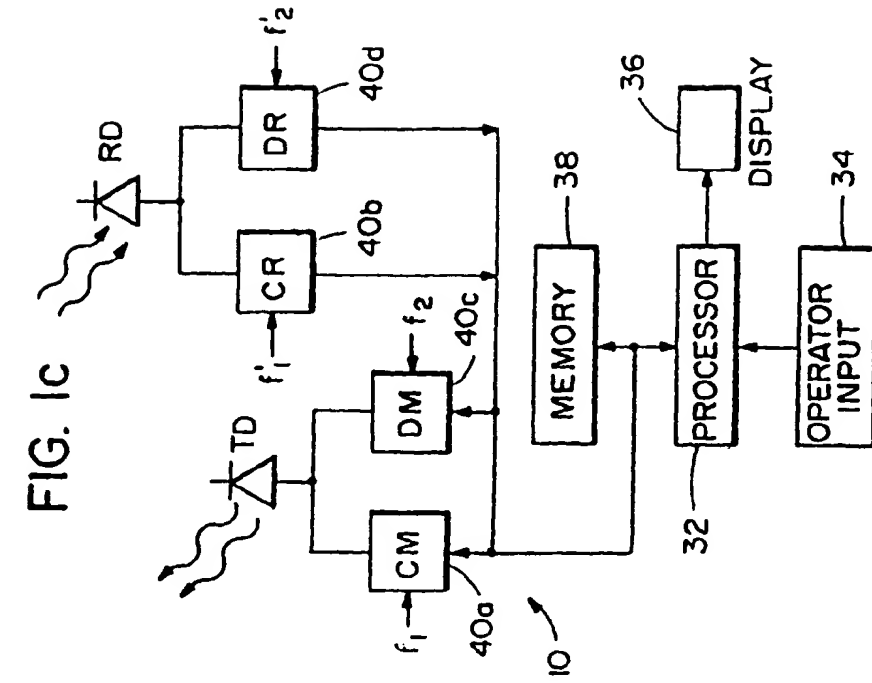




FIG. 3

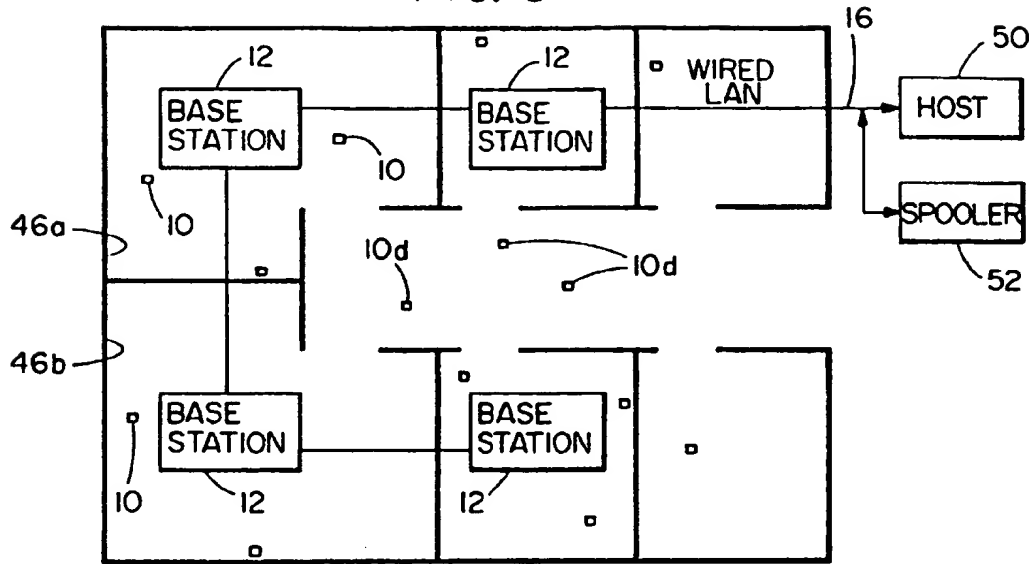


FIG. 4

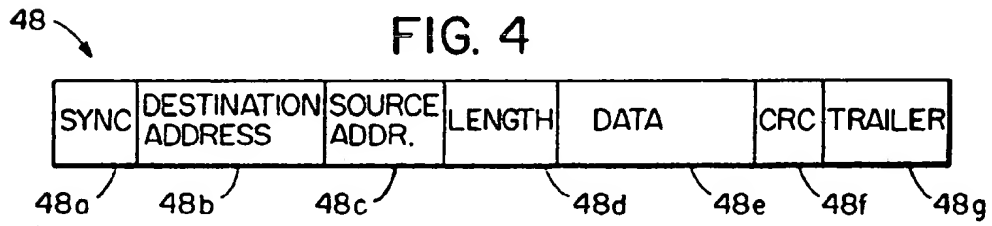


FIG. 6

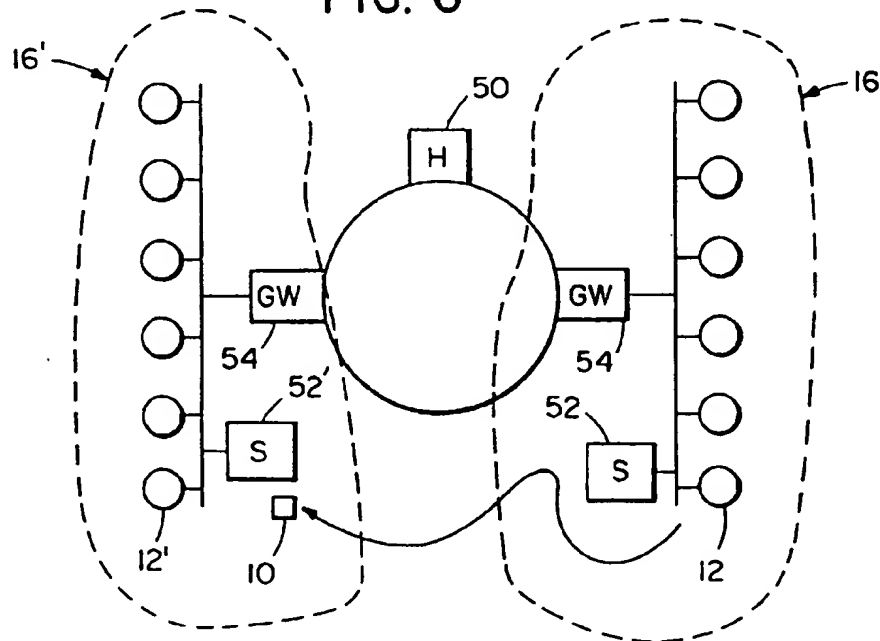


FIG. 5

<u>STEP</u>	<u>MOBILE UNIT (MU)</u>	<u>ORIGINAL BASE STATION (OBS)</u>	<u>NEW BASE STATION (NBS)</u>
A	LINK BROKEN	DELETE MU FROM ACTIVE GROUP	
B		RE-DIRECT ADDITIONAL DATA- GRAMS TO SPOOLER	
C	LINK ESTABLISHED		ADD MU TO ACTIVE GROUP
D	PROVIDE OBS ID AND SPOOLER ID	PROVIDE SPOOLER ID	QUERY MU FOR OBS ID AND SPOOLER ID, QUERY OBS FOR SPOOLER ID
E	RECEIVE DATAGRAMS	CONTINUE TO RE- DIRECT ADDITIONAL DATAGRAMS TO SPOOLER	QUERY SPOOLER... FOR DATAGRAMS, TRANSMIT DATAGRAMS TO MU
( IF NEW BASE STATION = ORIGINAL BASE STATION )			
F		STOP RE-DIRECTING ADDITIONAL DATAGRAMS TO SPOOLER, COMPLETE HANDOFF	SPOOLER EMPTY, COMPLETE HAND- OFF BY INFORMING LAN, NEW DATA- GRAMS FOR MU DIRECTED TO NBS
( IF NEW BASE STATION $\neq$ ORIGINAL BASE STATION )			
G		STOP RE-DIRECTING ADDITIONAL DATAGRAMS TO SPOOLER, SEND "SENT LOG", COMPLETE HANDOFF	INFORM BRIDGE(S) OF NEW MU LOCATION. NOTIFY OBS AND RECEIVE "SENT LOG"